



CV-A50/A60

Compact Industrial Monochrome CCD Camera




- New compact size 1/2" and 1/3" monochrome CCD cameras
- CCIR: 752 (h) x 582 (v) pixels. EIA: 768 (h) x 494 (v) pixels
- Improved sensitivity, dynamic range and smear performance
- High S/N ratio up to 60 dB
- Extended range of functions and options compared with CV-M50
- Shutter speeds from Off to 1/10,000 sec.
- Programmable exposure
- Interlaced or non-interlaced scanning. Field or frame accumulation
- Internal, external HD/VD or random trigger synchronization
- Edge pre-select, pulse width control, start/stop trigger modes
- Long time exposure with external VD pulse interval
- Frame-delay read out in connection with pulse width controlled shutter
- Exposure enable EEN, write enable WEN and pixel clock output
- Short ASCII commands for fast mode setup via serial port
- Setup by Windows 95/98/NT software via RS 232C

The leading manufacturer of high performance camera solutions


Specifications for CV-A50/A60

Specifications	CCIR	EIA
Scanning system	625 lines 25 frames/sec.	525 lines 30 frames/sec.
CCD sensor CV-A50	Monochrome 1/2" IT CCD	
CCD sensor CV-A60	Monochrome 1/3" IT CCD	
Sensing area	CV-A50 CV-A60	6.4 (h) x 4.8 (v) mm 4.9 (h) x 3.7 (v) mm
Effective pixels	752 (h) x 582 (v)	768 (h) x 494 (v)
Pixels in video output	737 (h) x 575 (v)	758 (h) x 486 (v)
Cell size	CV-A50 CV-A60	8.6 (h) x 8.3 (v) μm 6.5 (h) x 6.25 (v) μm
Resolution horizontal	570 TV lines	
Sensitivity on sensor CV-A50	0.03 Lux, Max gain, 50% video	
CV-A60	0.05 Lux, Max gain, 50% video	
S/N ratio	CV-A50 CV-A60	59 dB 60 dB 59 dB
Video output	Composite VS signal, 1.0 Vpp, 75 Ω	
Gamma	0.45 or 1.0	
Gain	Manual – Automatic	
Gain range	0 to +15 dB	
Accumulation	Field – Frame	
Synchronization	Int. X-tal. Ext HD/VD or random trigger	
Scanning	2:1 interlaced, non-interlaced	
HD sync. input/output	4 V, 75 Ω	
Trigger input	4 V, 75 Ω	
WEN output (write enable)	4 V, 75 Ω	
EEN out. (exposure enable)	4 V, 75 Ω	
Pixel clock output	4 V, 75 Ω	
Shutter	(off), 1/100, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10,000 sec.	
Pulse width control	1.5 H to 1000 H	
Start/stop	1/50 to 1/10,000 sec. 1/60 to 1/10,000 sec.	
Long time exposure	1 field to ∞	
Programmable exposure	2.5 H to 252.5 H	
Frame delay readout	Time from PWC trigger input to ext. VD input	
Functions controlled by RS 232C	Scanning format, Trigger mode, Shutter speed, Trigger/WEN polarity, Accumulation, Shutter mode, Programmable exposure, AGC level, White clip, Setup, Manual gain, AGC/manual gain, Internal/ potentiometer gain set, Gamma, Pixel clock, Commands and internal adjustments.	
Functions controlled by DIP switches	VD input/output, HD input/output, internal HD and VD 75 Ω termination on/off	
Operating temperature	-5°C to +45°C.	
Humidity	20 - 80% non-condensing	
Storage temp./humidity	-25°C to 60°C./20% - 90 %	
Power	12V DC ± 10%. 1.5 W	
Lens mount	C-mount	
Dimensions	29 x 44 x 66 mm (HxWxD)	
Weight	150 g	

Trigger/Readout Modes

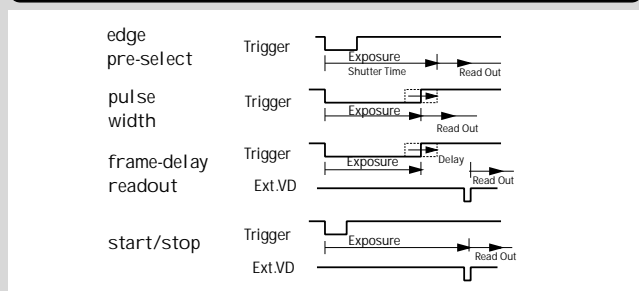


Connection Description

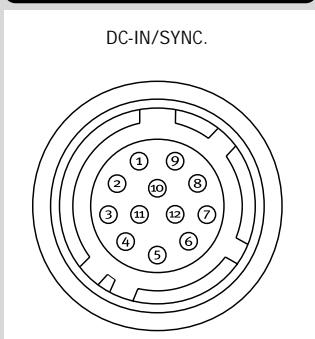

- HIROSE HR10A-10R-12P
- Pin 1 Ground
2 +12V DC
3 Ground
4 Video output
5 Ground
6 HD input/HD output
7 VD input/VD output
8 Ground
9 Pixel clock output
10 WEN output
11 Trigger input
12 Ground

(Pin configuration compatible with EIAJ standard)

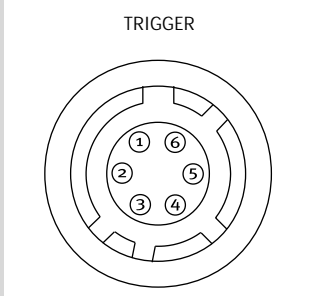


- HIROSE HR10A-7R-6P
- Pin 1 TXD
2 RXD
3 Ground
4 Ground
5 Trigger input
6 EEN output

Plugs for cable:
12 pin: HIROSE HR10A-10P-12S
6 pin: HIROSE HR10A-7P-6S


Ordering Information

- CV-A50C 1/2" Monochrome Camera. CCIR
- CV-A60C 1/3" Monochrome Camera. CCIR
- CV-A50E 1/2" Monochrome Camera. EIA
- CV-A60E 1/3" Monochrome Camera. EIA
- MP40 Tripod Adapter (must be ordered separately)

Spectral Sensitivity

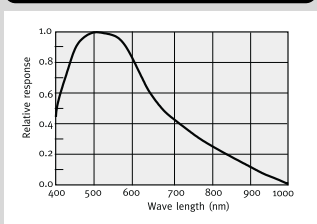

Dimensions

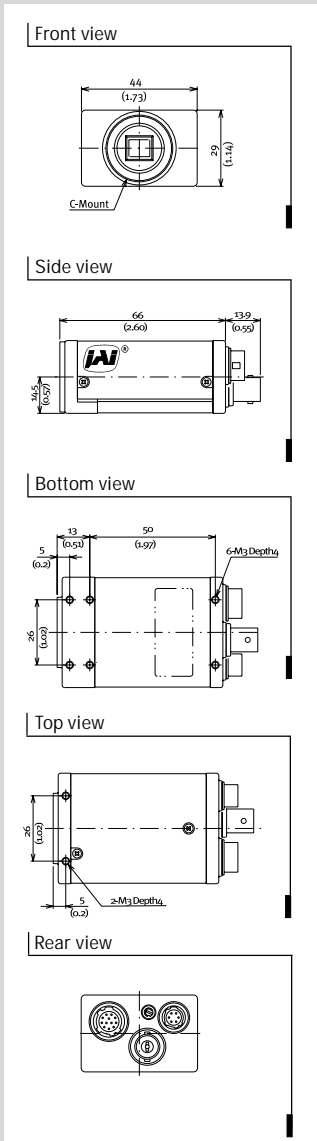

JAI A.S, Denmark
Phone +45 4457 8888
Fax +45 4491 8880
www.jai.com

JAI Corporation, Japan
Phone +81 45 933 5400
Fax +81 45 931 6142
www.jai-corp.co.jp

JAI UK Ltd., England
Phone +44 1442 879 669
Fax +44 1442 879 281
www.jai.com

JAI Vision OY, Finland
Phone +358 9 8256220
Fax +358 9 870 3345

JAI America Inc., USA
Phone (Toll-Free) +1 877 472-5909
Phone +1 949 472-5900
Fax +1 949 472-5908
www.jai.com



THE MECHADEMIC COMPANY

Visit our web site on www.jai.com

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI A.S. cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification.